


FK系列支撑座(圆型固定侧)

■部件详情

编号/Part No.	部件名 / Part name	数量/Qty
1	轴承座本体 / Housing	1
2	轴承 / Bearing	1组 / set
3	压板 / Holding lid	1
4	间隔圈 / Collar	2
5	轴封 / Seal	1
6	锁紧螺帽 / Lock nut	1组 / set
7	内六角止付螺母 Hexagon socket-head screws	2



■AK系列尺寸图

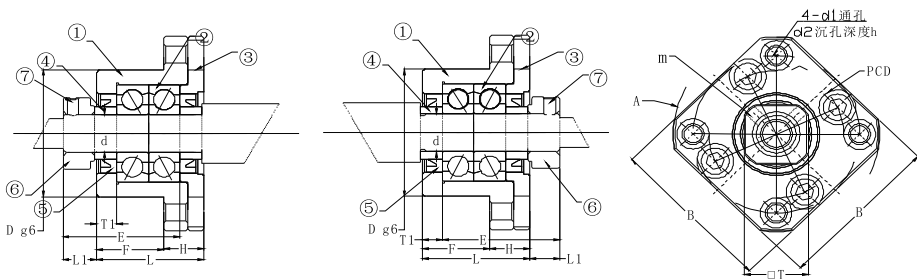

■FK系列选型参数表

单位 /Unit:mm

型号 Model No.	轴径 Shaft diameter d	L	H	F	E	D	A	P.C.D.	B	L1	T1	d1	d2	l	M (细牙螺纹)	T	油封适用轴径
FK6	6	20	7	13	22.5	22	36 35	28	28	6	3.5	3.4 2.9	6.5 5.5	4 3.5	M6X0.75	12 12	10
FK8	8	23	9	14	26	28	43	35	35	7	4	3.4	6.5	4	M8X1.0	14	10 11.5 12
FK10	10	29	13	16	29.5	34	52	42	42	5.5	5	4.5	8	6	M10X1.0	17	14
FK12	12					36	54	44	44						M12X1.0	19	15
FK15	15	32	15	17	38	40	63	50	52	8 10	6	5.5	9.5		M15X1.0	22	20
FK17	17	45	22	23	47	50	77	62	61	11	9	6.6	11	10	M17X1.0	24	22
FK20	20	52	22	30	52	57	85	70	68	10	10	6.6	11	10	M20X1.0	30	25
FK25	25	57	27	30	59	63	98	80	79	12	10	9	15	13	M25X1.5	35	31
FK30	30	62	30	32	61	75	117	95	93	11	12	11	17.5	15	M30X1.5	40	40

备注 (Note):

1. C7级使用 (6字头) 深沟球轴承轴向至大间隙0.005-0.01mm。(The use of C7(prefix 6) deep groove ball bearing maximum axial clearance of 0.005-0.01mm.)
2. C5级使用 (7字头) 角接触轴承经预压处理, 轴向0间隙。(The use of C5(prefix 7) by preloading angular contact bearings, axial clearance 0.)
3. 轴承采用德国产品, 采用DF组装至适宜滚珠丝杆使用。(The bearing is made of German brand, which is assembled by DF.)

FF系列支撑座(圆型支撑侧)




■部件详情

编号/Part No.	部件名 / Part name	数量/Qty
1	轴承座本体 / Housing	1
2	轴承 / Bearing	1组 / set
3	C型扣环 / Snap ring	1



■FF系列尺寸图

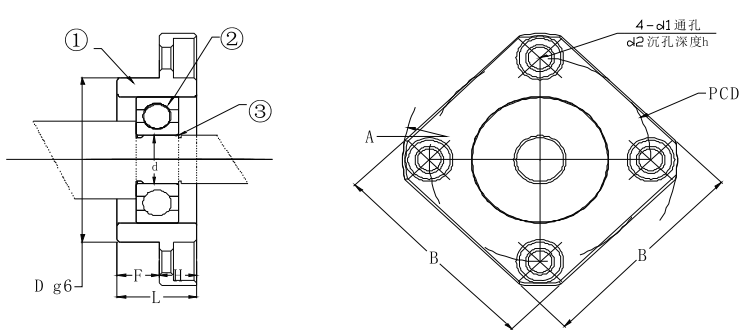

■FF系列选型参数表

单位 /Unit:mm

型号 Model No.	轴径 Shaft diameter d	L	H	F	D	A	P.C.D.	B	V	d1	d2	l	使用轴承	使用扣环
FF6	6	10	6	4	22	36	28	28	17	3.4	6.5	4	B606ZZ	STWN · S6
FF10	8	12	7	5	28	43	35	35	22	3.4	6.5		B608ZZ	STWN · S8
FF12	10	15	7	8	34	52	42	42	26	4.5	8		B6000ZZ	STWN · S10
FF15	15	17	9	8	40	63	50	52	32	5.5	9.5	5.5	B6002ZZ	STWN · S15
FF17	17	20	11	9	50	77	62	61	40	6.6	11	6.5	B6203ZZ	STWN · S17
FF20	20	20	11	9	57	85	70	68	47	6.6	11	6.5	B6204ZZ	STWN · S20
FF25	25	24	14	10	63	98	80	79	52	9	14	8.5	B6205ZZ	STWN · S25
FF30	30	27	18	9	75	117	95	93	62	11	17	11	B6206ZZ	STWN · S30

备注 (Note):

1. C7级使用 (6字头) 深沟球轴承轴向至大间隙0.005-0.01mm。
(The use of C7(prefix 6) deep groove ball bearing maximum axial clearance of 0.005-0.01mm.)