


SFU/SFNU系列规格尺寸表

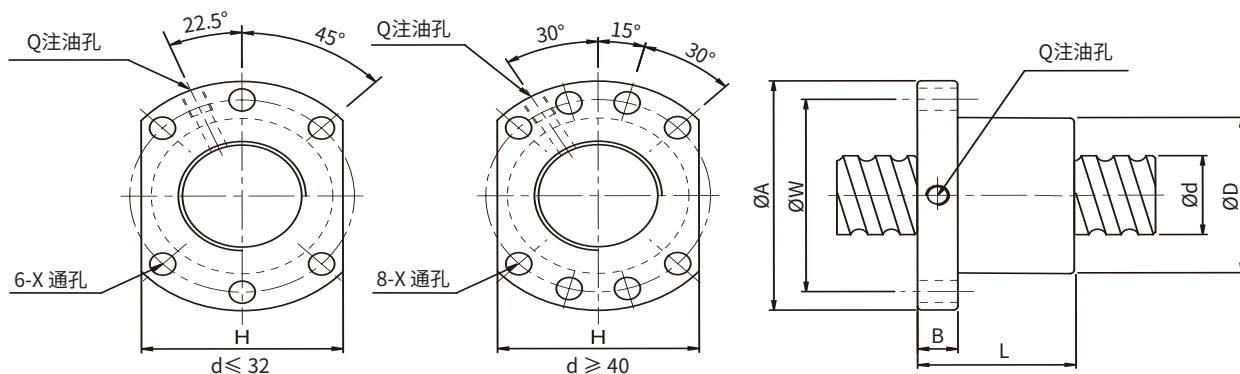

公称型号 Model No	轴径 Shaft diameter	导程 lead	球径 Steel ball diameter	螺母尺寸(mm) Nut size									额定 动载荷 Basic Dynamic Load Rating	额定 静载荷 Basic Staic Load Rating	刚性 Rigidity	重量 Weight	
				D	A	B	L	W	H	X	Q	n	Ca	Coa	K	螺母 Nut	丝杆轴 Screw shaft
													kgf	kgf	Kgf/μm	kg	kg/m
SFUR1604-3	16	4	2.381	28	48	10	36	38	40	5.5	M6x1	1x3	488	940	17	0.184	1.57
☆ SFUR1605-3		5	3.175	28	48	10	42	38	40	5.5	M6x1	1x3	666	1143	30	0.182	1.57
☆ SFUR1605-4		5	3.175	28	48	10	50	38	40	5.5	M6x1	1x4	888	1525	23	0.182	1.57
SFUR2004-3	20	4	2.381	36	58	10	42	47	44	6.6	M6x1	1x3	541	1187	22	0.294	2.43
☆ SFUR2005-3		5	3.175	36	58	10	42	47	44	6.6	M6x1	1x3	749	1495	14	0.984	2.43
SFUR2504-3	25	4	2.381	40	62	10	42	51	48	6.6	M6x1	1x3	605	1534	40	0.362	3.82
☆ SFUR2510-4		10	4.762	40	62	12	85	51	48	6.6	M6x1	1x4	1903	3695	45	0.42	3.81
SFUR3210-4	32	10	6.35	50	80	12	90	65	62	9	M6x1	1x4	3092	6101	34	0.74	6.27
SFUR4010-3	40	10	6.35	63	93	14	71	70	70	9	M8x1	1x3	2610	5834	55	1.2	9.82
SFUR4010-4		10	6.35	63	93	14	93	70	70	9	M8x1	1x4	3480	7779	43	1.201	9.82
SFUR5010-4	50	10	6.35	75	110	16	93	85	85	11	M8x1	1x4	3898	10325	27	2.532	15.2
SFUR6310-4	63	10	6.35	90	125	18	98	95	95	11	M8x1	1x4	4401	13611	42	4.652	23.65
SFUR6320-4		20	9.525	95	135	20	149	100	100	13.5	M8x1	1x4	7404	19008	60	4.888	24.27
SFUR8010-4	80	10	6.35	105	145	20	98	110	110	13.5	M8x1	1x4	4900	17366	67	8.832	38.25
SFUR8020-4		20	9.525	125	165	25	154	130	130	13.5	M8x1	1x4	8403	25345	54	9.016	39.27
☆ SFNUR1204-4	12	4	2.5	24	40	10	40	32	30	5.5	M6x1	1x4	572	1015	16	0.138	0.87
SFNUR1604-4	16	4	3.175	28	48	10	40	38	40	5.5	M6x1	1x4	655	1417	21	0.18	1.57
☆ SFNUR1605-4		5	3.175	28	48	10	45	38	40	5.5	M6x1	1x4	919	1789	21	0.19	1.56
☆ SFNUR1610-3		10	3.175	28	48	10	57	38	40	5.5	M6x1	1x3	669	1223	14	0.22	1.56
☆ SFNUR2005-3	20	5	3.175	36	58	10	42	47	44	6.6	M6x1	1x3	831	1782	20	0.294	2.45
☆ SFNUR2005-4		5	3.175	36	58	10	51	47	44	6.6	M6x1	1x4	1065	2376	26	0.316	2.45
☆ SFNUR2505-3	25	5	3.175	40	62	10	42	51	48	6.6	M6x1	1x3	953	2334	25	0.362	3.83
☆ SFNUR2505-4		5	3.175	40	62	10	51	51	48	6.6	M6x1	1x4	1137	2830	30	0.35	3.83
☆ SFNUR2510-3		10	4.762	40	62	12	70	51	48	6.6	M6x1	1x3	1399	2786	22	0.35	3.81
☆ SFNUR2510-4		10	4.762	40	62	12	80	51	48	6.6	M6x1	1x4	1792	3714	28	0.484	3.81
☆ SFNUR3205-4	32	5	3.175	50	80	12	52	65	62	9	M6x1	1x4	1313	3861	37	0.588	6.29
☆ SFNUR3210-3		10	6.35	50	80	12	74	65	62	9	M6x1	1x3	2499	5366	30	0.66	6.23
☆ SFNUR3210-4		10	6.35	50	80	12	85	65	62	9	M6x1	1x4	3201	7154	40	0.832	6.23
☆ SFNUR4005-4	40	5	3.175	63	93	14	55	70	70	9	M8x1	1x4	2895	5042	46	0.97	9.84
☆ SFNUR4010-4		10	6.35	63	93	14	88	70	70	9	M8x1	1x4	3707	9503	50	1.246	9.78
☆ SFNUR5010-4	50	10	6.35	75	110	16	88	85	85	11	M8x1	1x4	4219	12450	21	1.82	15.33
SFNUR6310-4	63	10	6.35	90	125	18	93	95	95	11	M8x1	1x4	4815	16576	76	2.576	24.39
SFNUR8010-4	80	10	6.35	105	145	20	93	125	110	13.5	M8x1	1x4	6926	29652	91	3.1	39.38

注：有标注☆记号的可制作左旋丝杆